



NOTES:

* THREAD DESIGNATION (PITCH)
MUST BE SUPPLIED UPON ORDER

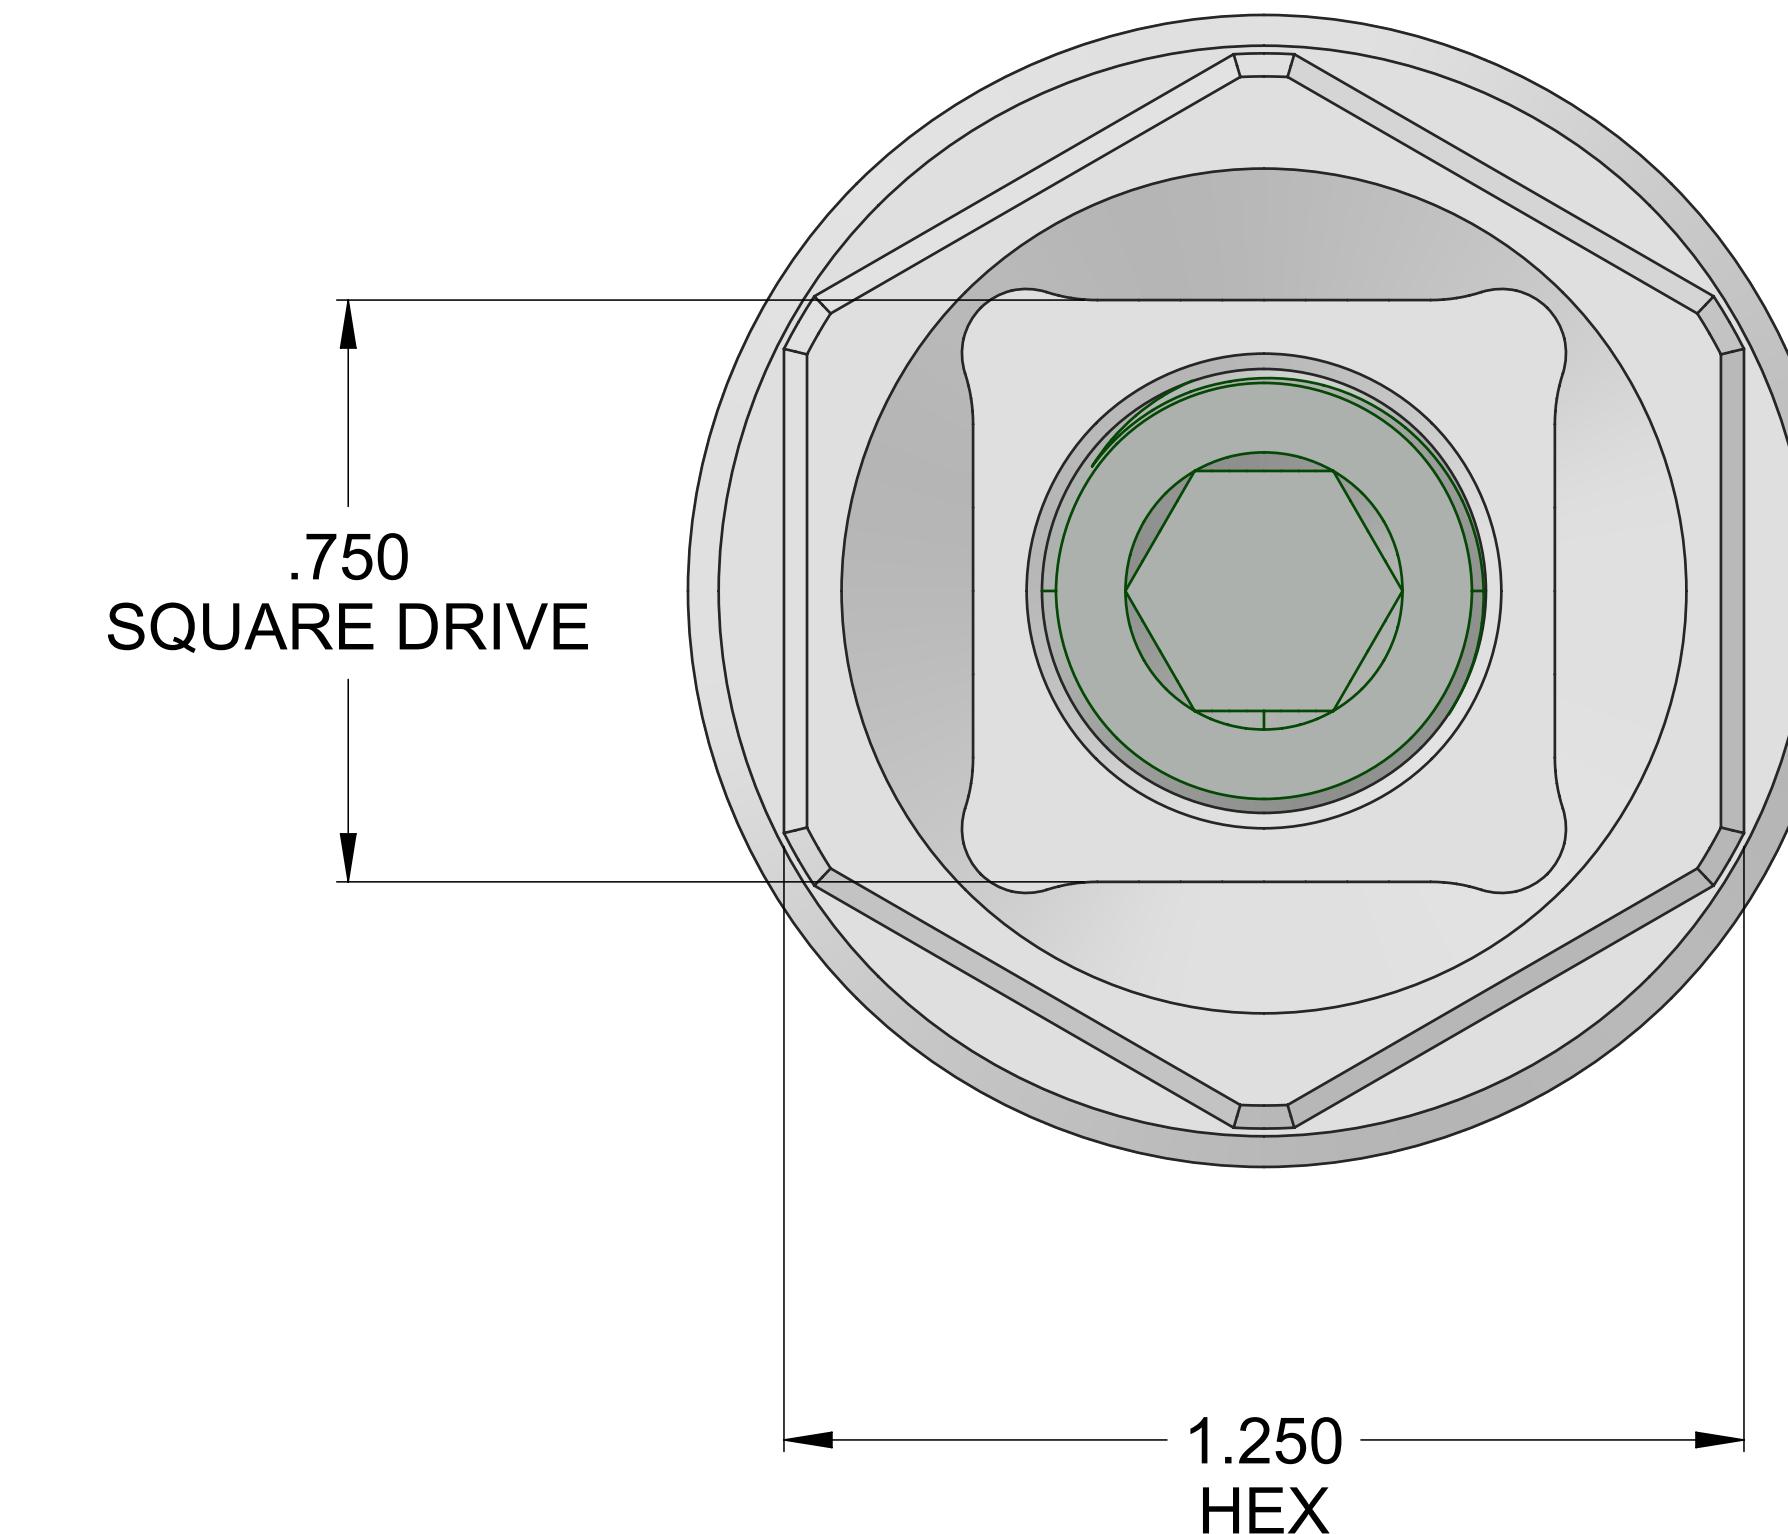

FINISH OR TREATMENT	MATERIAL	DESIGNER	J. UNDERWOOD	WEIGHT (LBS)	1.054
QPQ	4141 CHT	DRAWN	J. UNDERWOOD		
UNLESS OTHERWISE SPECIFIED		APPROVED	R. HENDRIX		
TOLERANCES .X = ±.1, XX = ±.01, XXX = ±.005 ANGLE TOL. = ±.5° INSIDE CORNER R.03 CONCENTRIC TO .005 FIM	SURFACE FINISHES MACHINED: Ra 125; L=.030	REVISED			
CONFIDENTIAL AND TRADE SECRET DO NOT DISCLOSE, USE OR REPRODUCE WITHOUT PRIOR WRITTEN APPROVAL FROM SRT MANUFACTURING.	DIMENSIONS INCLUDE APPLIED SURFACE TREATMENTS				
	REMOVE BURRS AND BREAK EDGES .005 - .015				
		PART NO.		REVISION	
		SIT750-*		UNITS	PAGE
				INCH	1 OF 1

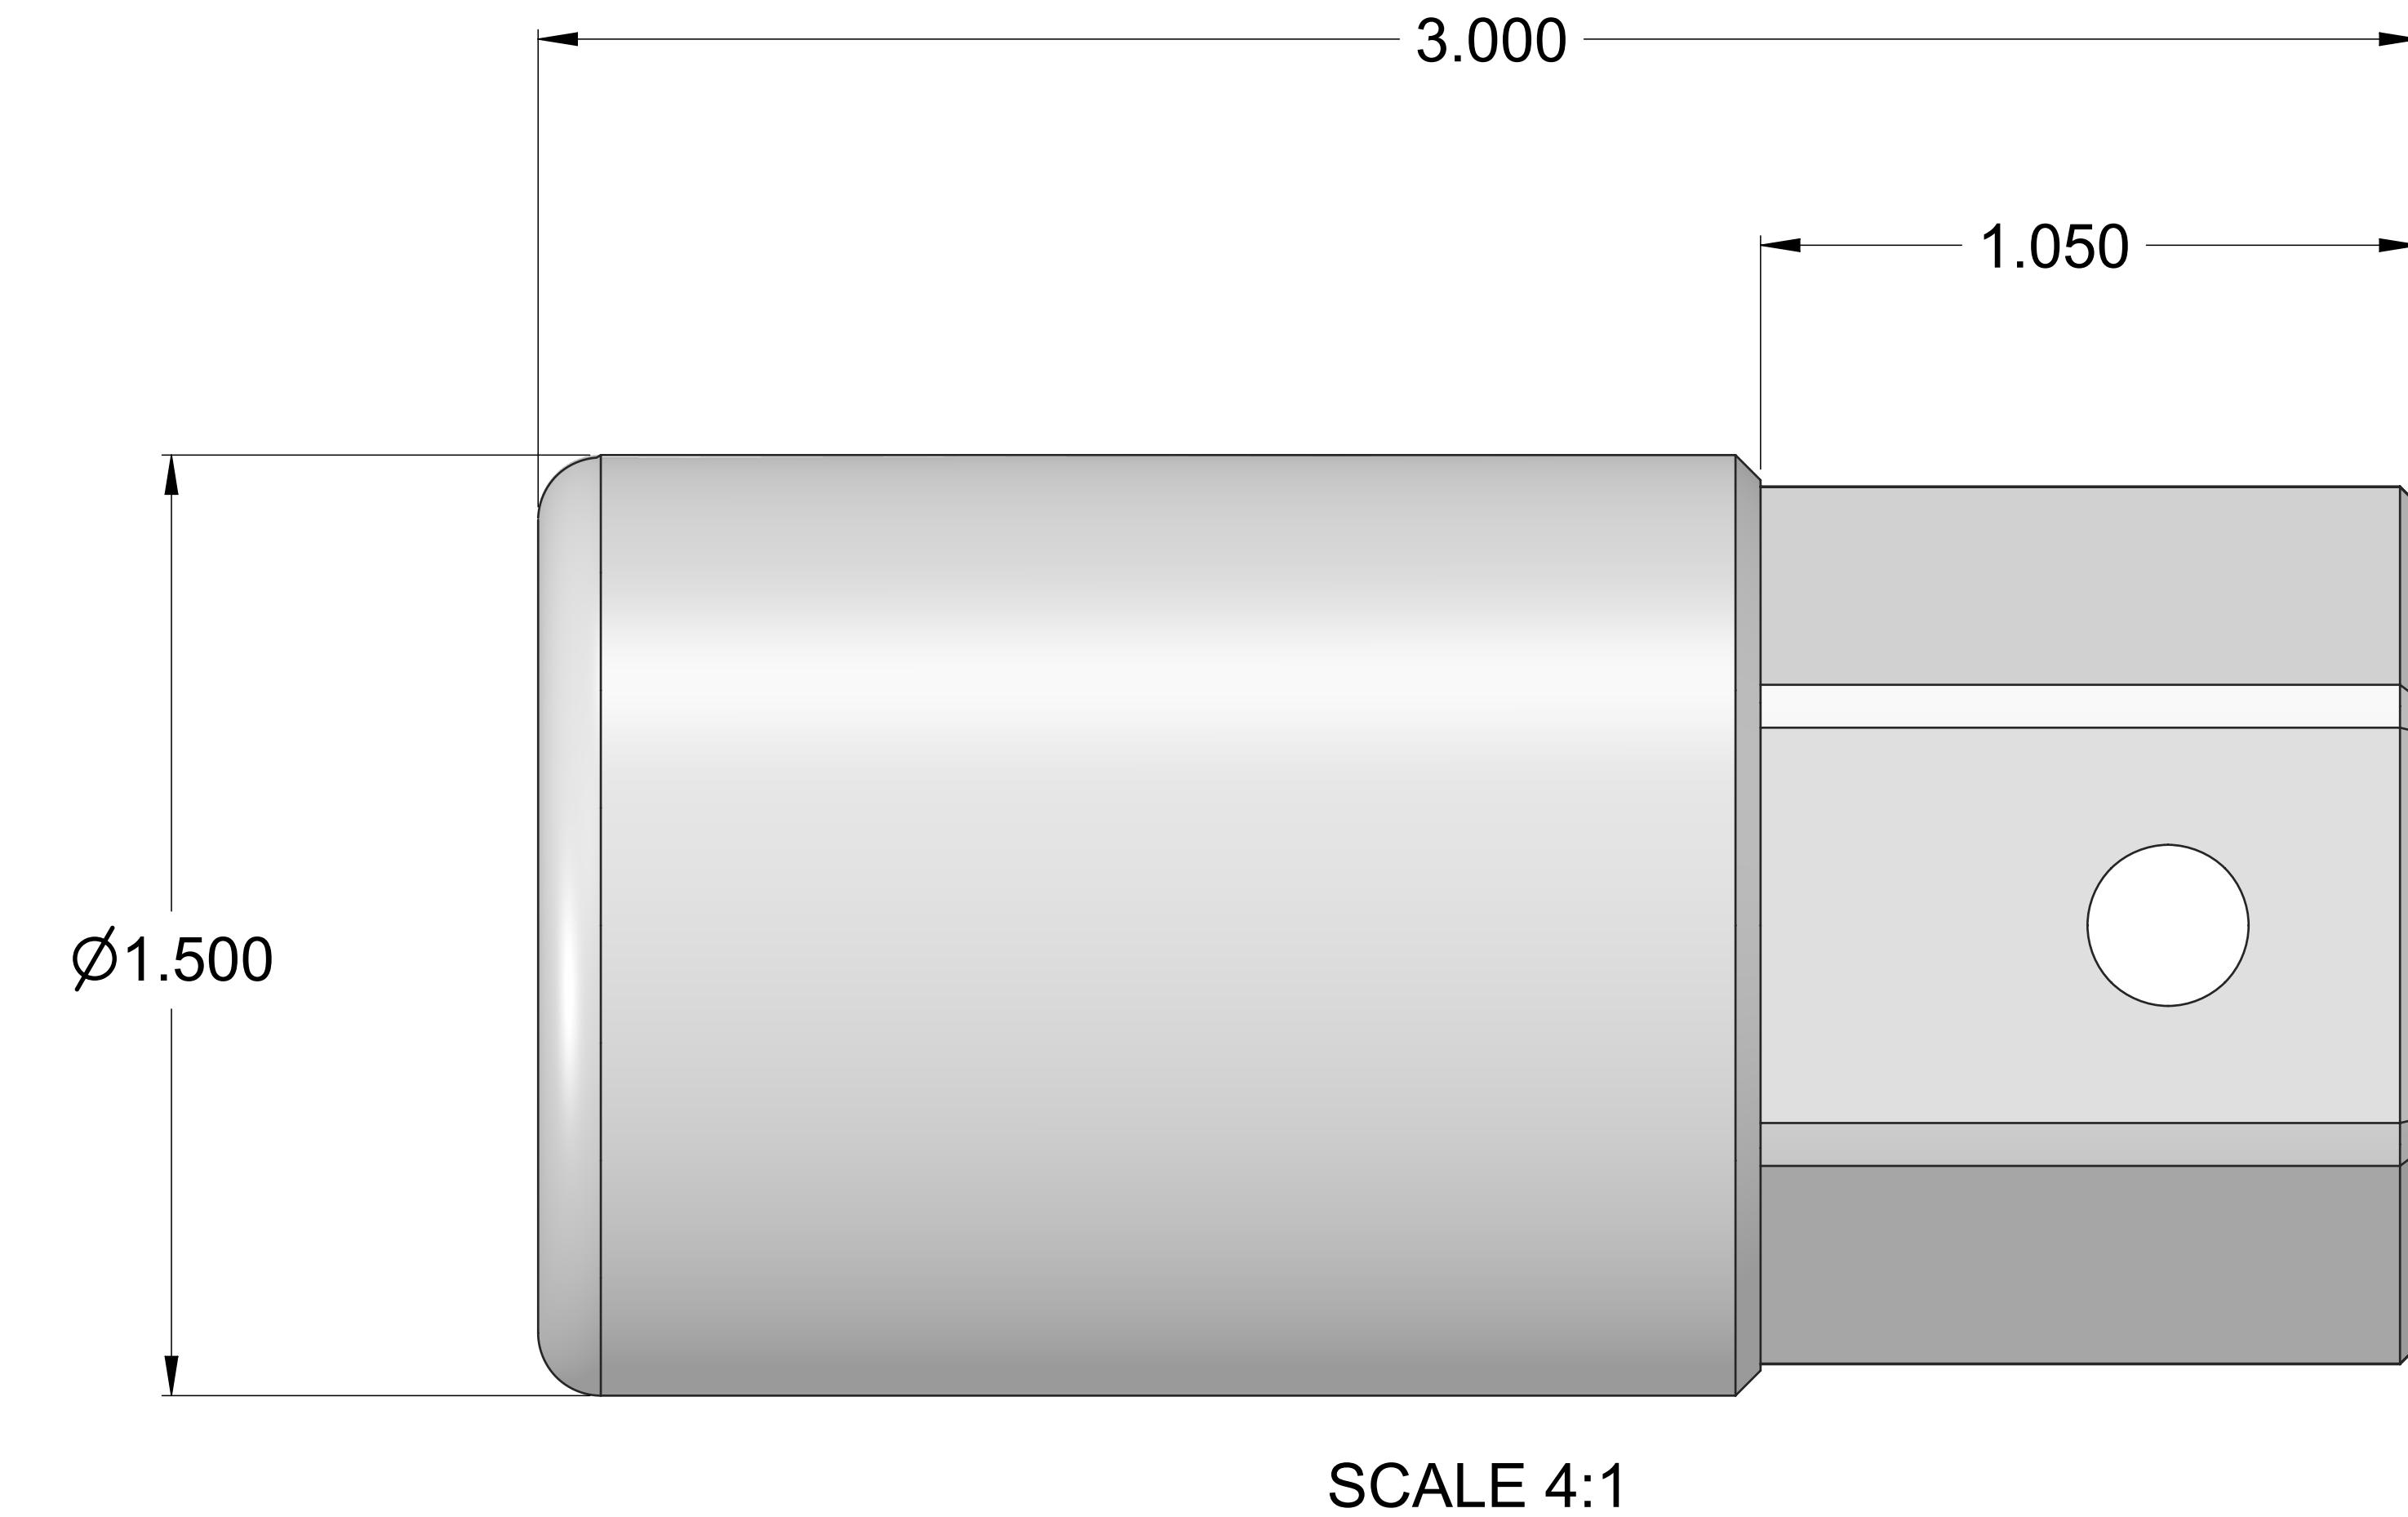

.750 STUD INSTALL TOOL